

# VALVE-REGULATED LEAD ACID BATTERIES: INDIVIDUAL DATA SHEET


## LC-R122R2P



Photo/Label for reference only.

For main and standby power supplies.  
Expected trickle life: 3-5 years at 25°C, Approx. 5 years at 20°C.


### Dimensions (mm)

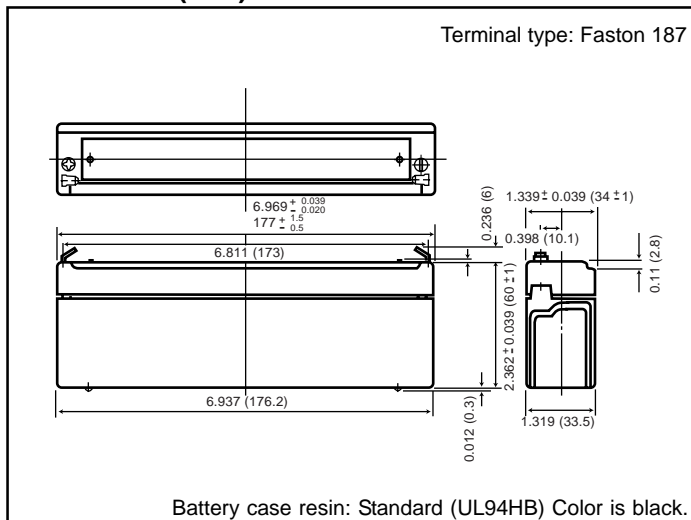

### Specifications

Nominal voltage		12V
Rated capacity (20 hour rate)		2.2Ah
Dimensions	Length	6.968 inches (177.0 mm)
	Width	1.339 inches (34.0 mm)
	Height	2.362 inches (60.0 mm)
	Total Height	2.598 inches (66.0 mm)
Approx. mass		1.76 lbs (0.80 kg)
Standard Terminals and Resin	UL94HB Faston 187	LC-R122R2P

### Discharge characteristics 77°F (25°C) (Note)

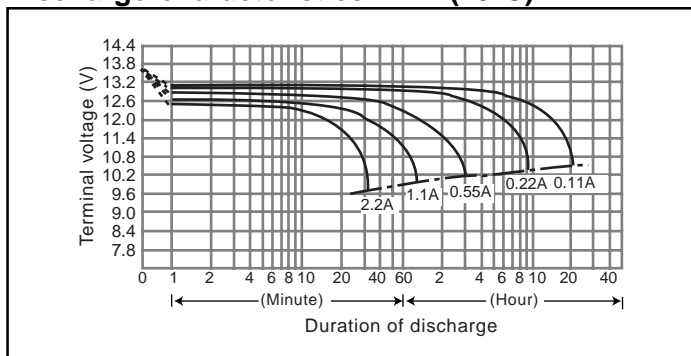

### Characteristics

Capacity (note) 77°F (25°C)	20 hour rate (110mA)	2.2Ah	
	10 hour rate (200mA)	2Ah	
	5 hour rate (360mA)	1.8Ah	
	1 hour rate (1300mA)	1.3Ah	
	1.5 hour rate discharge Cut-off voltage 10.5 V	0.95A	
Internal resistance	Fully charged battery 77°F (25°C)	Approx. 70mΩ	
Temperature dependency of capacity (20 hour rate)	104°F (40°C)	102%	
	77°F (25°C)	100%	
	32°F (0°C)	85%	
	5°F (-15°C)	65%	
Self discharge 77°F (25°C)	Residual capacity after standing 3 months	91%	
	Residual capacity after standing 6 months	82%	
	Residual capacity after standing 12 months	64%	
Charge Method (Constant Voltage)	Cycle use (Repeating use)	Initial current	0.88 A or smaller
		Control voltage	14.5V to 14.9 V (per 12V cell 25°C)
	Trickle use	Initial current	0.33 A or smaller
		Control voltage	13.6V to 13.8V (per 12V cell 25°C)

(Note) The above characteristics data are average values obtained within three charge/discharge. Cycles not the minimum values.

### Duration of discharge vs. Discharge current (Note)

